

Installation Instructions

COMPRESSION TOOL - Small/Large



Please Read! Please read and understand these instructions completely before installation to avoid possible injury to yourself, or damage to the accessory or vehicle. Read all **Cautions, Warnings** and **Notes** within installation instructions and on bags. If you are unsure about securing the bag, please contact us at 1-800-558-7755 ext. 123. Monday through Friday 8:00 am - 4:30 pm CST


1. PARTS LIST:

This Product contains the following components. Before beginning installation confirm there are no missing or damaged components.

Item #	Description	Qty
1.	Compression Tool	1

2. PREPARATION:

- a. All straps should be extended to the fully opened position.
- b. Compression Tool should be fully opened (Fig. 1)

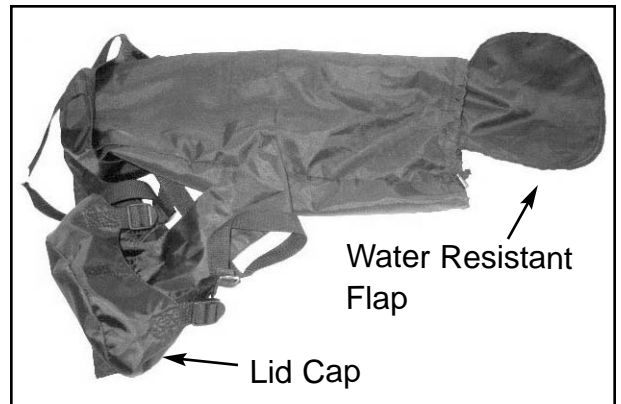

3. INSTALLATION:

- a. Fill compression tool with soft flexible items that will not damage under pressure.
- b. Fold water resistant flap over opening of bag and tuck edges inside of bag (Fig. 2).
- c. Pull draw cord tight, making sure water resistant flap remains inside of bag (Fig. 3).
- d. Place lid cap over opening.
- e. Pull all web straps tight until desired compression is achieved (Fig. 4).
- f. Use the Velcro wrap to retain excess strap (Fig. 5).



4. MAINTENANCE:

Periodically check Compression or bag. Re-adjust and/or re-tighten as required.

5. CARE AND CLEANING:

Wash using mild house hold detergent and soft brush to remove dirt or road grime. Rinse Thoroughly and dry before using. Do not put in washer or dryer, dry cleaning is not recommended.

6. CUSTOMER SERVICE:

For further information contact Dowco inc. at
 DOWCO Inc.
 4230 Clipper Dr.
 Manitowoc, WI 54220 USA
 Phone: 1-800-558-7755
 Fax: 920-682-5891
 email: feedback@dowco-inc.com