



Guardian Trailerable Snowmobile Cover Installation Instructions/Warranty


Thank you for purchasing a DOWCO, Inc. Guardian Trailerable Snowmobile cover. We are pleased that you have selected one of the many fine quality products that we produce for recreational vehicles.

Guardian-brand trailerable snowmobile covers are custom fit and made to match the most popular snowmobile models. Your snowmobile cover has been designed and manufactured of the highest quality materials available for this recreational application. Manufactured from breathable 10-oz. cotton that is water, fade and mildew resistant. Enclosed web strapping sewn into a hemmed edge around the perimeter of the cover keeps the cover tight and makes it trailerable. The use of quick-release buckles and indestructible shock cord around the bottom makes your cover completely secure and trailerable. Another unique feature is the tie down system with added straps located at the top of the cover, which minimizes the amount of air trapped under the cover while trailering.

As is the case with all fabric products, care should be taken to keep sharp objects, hot items or solvents from coming in contact with the material.

Installation

1. Position the cover over handlebar area with the front of the cover facing the hood of the snowmobile. The cover has a tag sewn indicating the front of the cover.
2. Pull the cover down over the handlebars and position the zipper opening near the gas tank.
3. At the front of the snowmobile, pull cover over the nose area.
4. At the rear of the snowmobile, pull cover completely over the seat and rear bumper.
5. Assemble straps with hooks to buckles (see figure #1). The short straps are attached to buckles located at the bottom of the cover. The two long straps are attached to the buckles located on the top of the cover. Make sure all straps are secured tightly. If any portion of the cover is left loose while trailering, damage to the snowmobile or cover may occur. The hooks will attach easily to the track suspension. Do not overtighten straps. To release the straps, gently lift up on the lip of the buckle and disconnect hook.

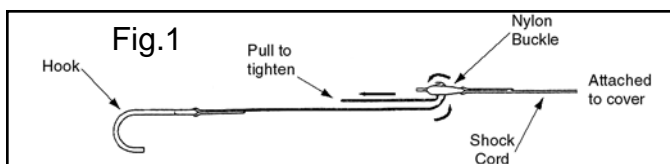

6. There is an additional web loop located at the nose. You may find it necessary to secure this area so the front is tighter. To do this you may tie a piece of rope from one ski to the other, running the rope through the loop.

Care & Cleaning

To clean cover, soak area that is dirty and gently scrub with a medium stiff brush, then rinse. Allow cover to air dry. **Do Not** machine dry.

Soap, heat, salt and prolonged exposure to the sun will damage the cover by causing a breakdown of dyes and also reduce the protective coating used to give it water and mildew resistance.

For summer storage, wash cover thoroughly inside and out to remove dirt and road salt. Air dry, then place cover back on snowmobile. **Do Not** store cover and snowmobile in direct sunlight.

Limited Warranty

DOWCO, Inc. warrants its covers (on a pro-rated basis) to be free from defects in material and workmanship for two years from date of original purchase.

This warranty does not cover damage caused by misuse, neglect, accident, or improper installation, allowing the item to come in contact with petroleum products, battery acid, chemicals or tree sap, not properly securing it, or allowing sharp objects to damage it.

All incidental and/or consequential damages are excluded from this warranty. Implied warranties are limited to the life of this warranty. Some states do not allow limitations on how long an implied warranty lasts or the exclusion of incidental or consequential damages, so the above exclusions or limitations may not apply to you. This warranty gives you specific legal rights. You may also have other legal rights which may vary from state to state.

Please call DOWCO, Inc. at (800) 558-7755 for a return materials authorization (RMA) number and send to:

DOWCO, Inc.
4230 Clipper Drive
Manitowoc, WI 54220

All returns **MUST** be returned prepaid to DOWCO, Inc. within 15 days of RMA issue. COD or collect shipments will not be accepted. Proof of purchase must accompany item. **UNAUTHORIZED RETURNS WILL NOT BE ACCEPTED.**

DOWCO, Inc.
4230 Clipper Drive
Manitowoc, WI 54220
Phone (800) 558-7755
Fax (920) 682-5891

Website: www.dowco-inc.com

FORM #00421
Printed in China